


VT-4B5

UL Approval: E214381 Version: B8

Aluminum Base Laminate

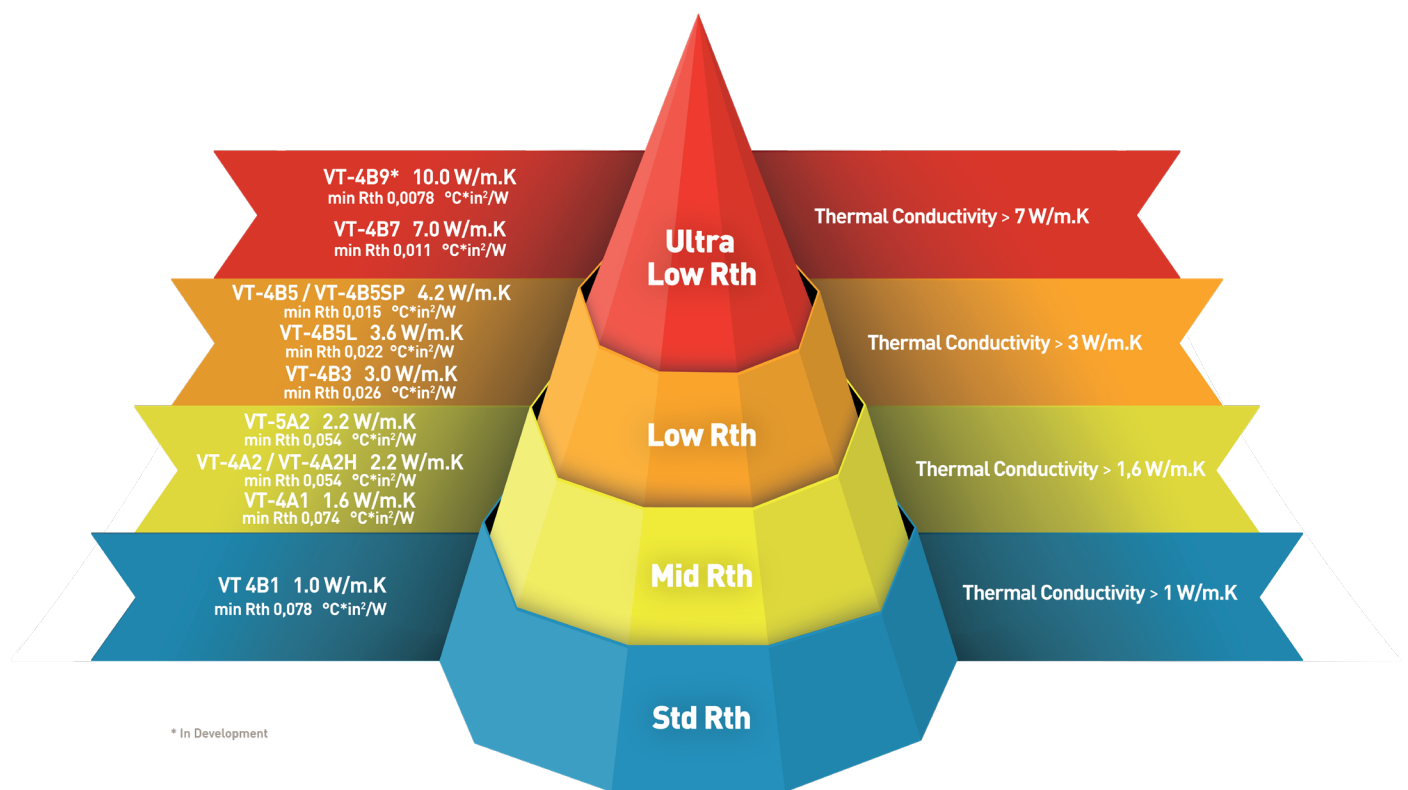

CORPORATE HEADQUARTERS

Ventec Electronics Co. Ltd.
308 TaiShan Rd,
New District Suzhou,
Jiangsu, P.R. China 215129
T: +86 512-68091810
Email: sales@ventec.com.cn

EMEA REGIONAL HEADQUARTERS

Ventec Europe
Unit 1 Trojan Business Centre,
Tachbrook Park Estate,
Leamington-Spa, CV34 6RH, UK
T: +44 1926-889822
Email: sales@ventec-europe.com

AMERICAS REGIONAL HEADQUARTERS

Ventec USA
700 Lee St., Elk Grove Village,
Illinois, IL 60007,
United States of America
T: +1 630-4221627
Email: saleseast@ventec-usa.com

www.ventecclaminates.com

VT-4B5

UL Approval: E214381 Version: B8

Aluminum Base Laminate

General Information

- > Thermal conductivity -- 4.2 W/mK
- > Ceramic Filled
- > Halogen Free
- > Flammability UL94 V-0
- > MOT 130°C

Application



- > Ultra bright LED Substrate
- > Power Conversion
- > PDP, LED, Regulator for TV
- > Monitor Drives
- > Rectifier, Power Supply

Storage Condition & Shelf Life

		Laminate
Storage Condition	Temperature	Room
	Relative humidity	/
Shelf Life		24 months

Designation of IMS Laminate

VT-4BX 1.0mm Alu (5052) .003" Dielectric 1oz Cu

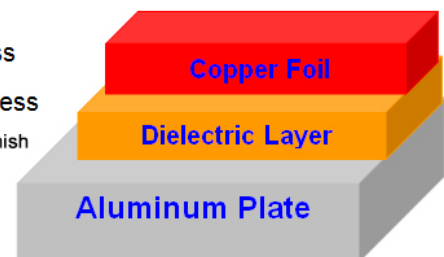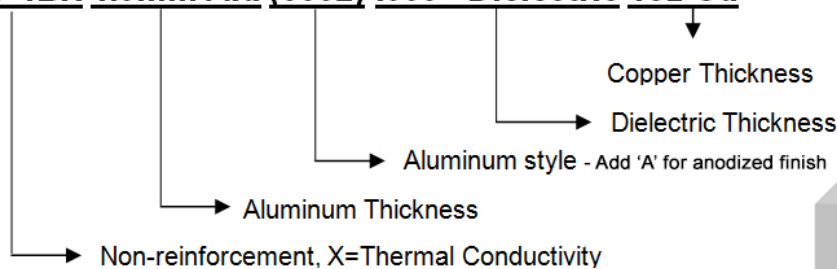

CORPORATE HEADQUARTERS

Ventec Electronics Co. Ltd.
308 TaiShan Rd,
New District Suzhou,
Jiangsu, P.R. China 215129
T: +86 512-68091810
Email: sales@ventec.com.cn

EMEA REGIONAL HEADQUARTERS

Ventec Europe
Unit 1 Trojan Business Centre,
Tachbrook Park Estate,
Leamington-Spa, CV34 6RH, UK
T: +44 1926-889822
Email: sales@ventec-europe.com

AMERICAS REGIONAL HEADQUARTERS

Ventec USA
700 Lee St., Elk Grove Village,
Illinois, IL 60007,
United States of America
T: +1 630-4221627
Email: saleseast@ventec-usa.com

www.ventec laminates.com

VT-4B5

UL Approval: E214381 Version: B8

Aluminum Base Laminate

Laminate Properties

Item	Test Method (IPC-TM-650)	Unit	VT-4B5					
			50µm	75µm	100µm	150µm	200µm	
Thermal Conductivity	ISO22007-2	W/m*K	4.2					
Thermal Impedance	ISO22007-2	°C*in ² /W	0.020	0.029	0.038	0.058	0.076	
Tg	DSC	2.4.25	°C					
Td	TGA	ASTM D3850	°C					
Thermal Stress	Solder Dip @ 288°C	2.4.13.1	Minute					
Hi-Pot Withstand	DC	2.5.7.2	V	2000	3000	4000	6000	9000
Breakdown Voltage	AC	2.5.6.3	V	4000	7000	8000	10000	12000
Dk @ 1MHz	C-24 /23 / 50	2.5.5.3	-					
Df @ 1MHz	C-24/ 23 / 50	2.5.5.3	-					
Volume Resistance	After Moisture	2.5.17.1	MΩ-cm	5.0E+8				
	E-24/125			3.0E+7				
Surface Resistance	After Moisture	2.5.17.1	MΩ	2.0E+7				
	E-24/125			5.0E+6				
Peel strength (1oz)	As Received	2.4.8	Lb/in	7				
CTI	As Received	ASTM D3638	V	600				
Flammability	As Received	UL 94	Rating	V-0				
RTI	Electric	UL 94	°C	130				
	Mechanical	UL 94	°C	130				

All test data provided are typical values and not intended to be specification values.

CORPORATE HEADQUARTERS

Ventec Electronics Co. Ltd.
 308 TaiShan Rd,
 New District Suzhou,
 Jiangsu, P.R. China 215129
 T: +86 512-68091810
 Email: sales@ventec.com.cn

EMEA REGIONAL HEADQUARTERS

Ventec Europe
 Unit 1 Trojan Business Centre,
 Tachbrook Park Estate,
 Leamington-Spa, CV34 6RH, UK
 T: +44 1926-889822
 Email: sales@ventec-europe.com

AMERICAS REGIONAL HEADQUARTERS

Ventec USA
 700 Lee St., Elk Grove Village,
 Illinois, IL 60007,
 United States of America
 T: +1 630-4221627
 Email: saleseast@ventec-usa.com

www.ventec laminates.com

VT-4B5

UL Approval: E214381 Version: B8

Aluminum Base Laminate

Availability

Laminate

Item		Availability
Dielectric		.002" (50µm), .003" (75µm), .004" (100µm), .006" (150µm), .008" (200µm)
Standard Size	Imperial	18.11*24.02, 20.08*24.02, 20.98*24.02, 18.11*48.03, 20.08*48.03, 20.98*48.03
	Metric	460*610, 510*610, 533*610, 460*1220, 510*1220, 533*1220
Copper Weight		1/3oz, Hoz, 1oz, 2oz, 3oz, 4oz, 6oz
Aluminum Thickness		0.6mm, 0.8mm, 1.0mm, 1.2mm, 1.5mm, 2.0mm, 3.0mm
Aluminum Alloy		1100, 5052, or as required

Protective Film for Aluminium Plate

Type	Material	Max Operation Temperature
Standard	PET	170 °C
High Temperature	Polyimide	270 °C

CORPORATE HEADQUARTERS

Ventec Electronics Co. Ltd.
308 TaiShan Rd,
New District Suzhou,
Jiangsu, P.R. China 215129
T: +86 512-68091810
Email: sales@ventec.com.cn

EMEA REGIONAL HEADQUARTERS

Ventec Europe
Unit 1 Trojan Business Centre,
Tachbrook Park Estate,
Leamington-Spa, CV34 6RH, UK
T: +44 1926-889822
Email: sales@ventec-europe.com

AMERICAS REGIONAL HEADQUARTERS

Ventec USA
700 Lee St., Elk Grove Village,
Illinois, IL 60007,
United States of America
T: +1 630-4221627
Email: saleseast@ventec-usa.com

www.ventec laminates.com